



Precision Digital Internal Micrometers

Electr. Digital Depth Micrometer • IP54

- spray water proof acc. to DIN 40050 / IEC 60529
- absolute System, high accuracy, with data output RS232

- LCD display with clear reading, mm/inch switchable
- frame lacquered, with insulation plates
- ORIGIN button, ABS/INC measurement system
- zero setting at any position, On/Off button
- clamp wheel for quick and precise fixing
- measuring pins and surface hardened and ground
- exchangeable measuring pins, half round shape
- no need to readjust after the change of anvils
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 20 20192/B), with operation manual

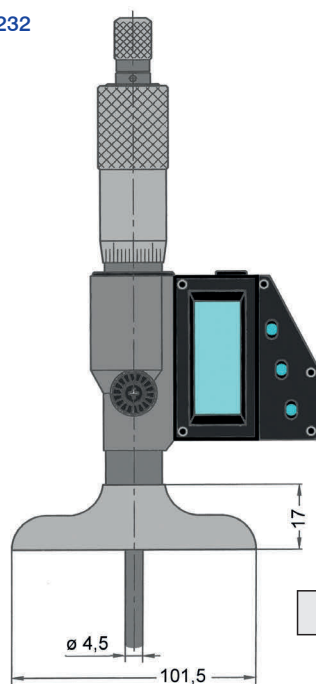


ART No	 mm / inch	 mm / inch	 ø mm	 mm	quantity of pins	 max. mm	 KG	ART No CC
23 1830	0 - 25 / 0 - 1	0.001 / 0.00005	18	0.5	1	0.004	0.363	23 94140
23 1831	0 - 50 / 0 - 2	0.001 / 0.00005	18	0.5	2	0.004	0.363	23 94140
23 1832	0 - 75 / 0 - 3	0.001 / 0.00005	18	0.5	4	0.005	0.375	23 94140
23 1833	0 - 100 / 0 - 4	0.001 / 0.00005	18	0.5	4	0.005	0.375	23 94140
23 1834	0 - 150 / 0 - 6	0.001 / 0.00005	18	0.5	6	0.005	0.375	23 94140
23 1835	0 - 200 / 0 - 8	0.001 / 0.00005	18	0.5	8	0.006	0.375	23 94140
23 1836	0 - 300 / 0 - 12	0.001 / 0.00005	18	0.5	12	0.007	0.375	23 94140

Electr. Digital Internal Micrometer

- for easy and rapid measurement of various internal intervals
- Absolute Measuring System, with data output RS232

- LCD display with clear reading, mm/inch switchable
- frame lacquered, with insulation plates, rounded carbide surfaces
- ORIGIN button, ABS/INC measurement system
- zero setting at any position, On/Off switch
- clamp wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 20 20192/B), with operation manual
- art.-no. 23 1620 with setting ring



ART No	 mm / inch	 mm / inch	 ø mm	 mm	 max. mm	 KG	ART No CC
23 1620	5 - 30 / 0.2 - 1.2	0.001 / 0.00005	18	0.5	0.003	0.275	23 94140
23 1621	25 - 50 / 1.0 - 2.0	0.001 / 0.00005	18	0.5	0.003	0.325	23 94140
23 1622	50 - 75 / 2.0 - 3.0	0.001 / 0.00005	18	0.5	0.004	0.465	23 94140
23 1623	75 - 100 / 3.0 - 4.0	0.001 / 0.00005	18	0.5	0.004	0.560	23 94140
23 1624	100 - 125 / 4.0 - 5.0	0.001 / 0.00005	18	0.5	0.005	0.615	23 94141
23 1625	125 - 150 / 5.0 - 6.0	0.001 / 0.00005	18	0.5	0.005	0.720	23 94141
23 1626	150 - 175 / 6.0 - 7.0	0.001 / 0.00005	18	0.5	0.005	0.780	23 94141
23 1627	175 - 200 / 7.0 - 8.0	0.001 / 0.00005	18	0.5	0.005	0.825	23 94141