







PT100 PROBES FOR PORTABLE INSTRUMENTS EQUIPPED WITH SICRAM MODULE				
CODE	°C max	τ s	DIMENSIONS	USE
TP 472 I	-196 +500	3s		
TP 473 P	-50 +400	5s		
TP 474 C	-50 +400	5s		
TP 472 I.0	-50 +400	3s		
TP 473 P.0	-50 +400	5s		
TP 474 C.0	-50 +400	5s		
TP 475 A.0	-50 +250	12s		
TP 472 I.5	-50 +400	3s		
TP 472 I.10	-50 +400	3s		

Temperature



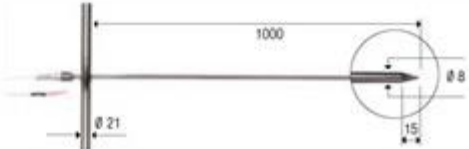


Temperature 9

KONTAKT:

MERAZET S.A.
ul. J. Krauthofera 36, 60-203 Poznań

tel. +48 61 864 46 00, fax: +48 61 865 19 33
e-mail: laboratorium@merazet.pl

Pt100 PROBES FOR PORTABLE INSTRUMENTS EQUIPPED WITH SICRAM MODULE				
CODE	°C max	τ s	DIMENSIONS	USE
TP 49 A	-70 +400	3,5s		
TP 49 AC	-70 +400	5,5s		
TP 49 AP	-70 +400	4s		
TP 87	-50 +200	3s		
TP 878	+5 +80	60s	Contact probe for solar panels. Cable L = 2m.	
TP 878.1	+5 +80	60s	Contact probe for solar panels. Cable L = 5m.	
TP879	-20 +120	60s	Penetration probe for compost. Cable L = 2m. 	
TP 875	-30 +120	15s	Globe-thermometer probe for measuring radiant heat ø150 mm. (ISO7243, ISO7726). 4 wires Pt100 Sensor cable L=2m. Equipped with SICRAM module.	
TP 876	-30 +120	15s	Globe-thermometer probe for measuring radiant heat ø50 mm. (ISO7243, ISO7726). 4 wires Pt100 Sensor cable L=2m. Equipped with SICRAM module.	




Pt100 / Pt1000 SENSOR PROBES WITH TP 47 MODULE				
CODE	°C max	τ s	DIMENSIONS	USE
TP 47.100 (Pt100) TP 47.1000 (Pt1000)	-50 +400	3s		
TP 47	Only connector for connection of probes without SICRAM module: direct 3 and 4 wires Pt100, 2 wires Pt1000.			

10 Temperature

KONTAKT:

MERAZET S.A.
ul. J. Krauthofera 36, 60-203 Poznań

tel. +48 61 864 46 00, fax: +48 61 865 19 33
e-mail: laboratorium@merazet.pl

P1100 SENSOR PROBES FOR OBSOLETE INSTRUMENTS				
CODE	°C max	τ s	DIMENSIONS	USE
S 8601 P	-50 +200	3,5s		
S 8601 PP	-50 +200	5s		
STS 3	-50 +150	3,5s		
STS 3/C	-50 +150	5s		
STS 3/P	-50 +150	5s		
TP 870	-50 +400	3s		
TP 870 C	-50 +400	5s		
TP 870 P	-50 +400	5s		
TP 870 A	-50 +250	12s		

Temperature

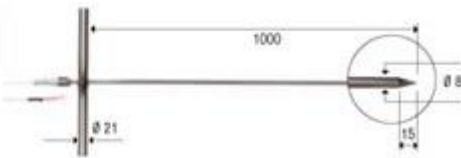


Temperature 11

KONTAKT:

MERAZET S.A.
ul. J. Krauthofera 36, 60-203 Poznań

tel. +48 61 864 46 00, fax: +48 61 865 19 33
e-mail: laboratorium@merazet.pl





PT100 SENSOR PROBES FOR OBSOLETE INSTRUMENTS				
CODE	°C max	τ s	DIMENSIONS	USE
TP 871	-50 +200	3s		
TP 872/500	-50 +400	10s		
TP 872/1000				
TP 873	-50 +500	6s		
TP 874	-30 +200	3s		
TP 875.1	-30 +120	15s	Globe-thermometer probe for measuring radiant heat ø150 mm. (ISO7243, ISO7726). 4 wires Pt100 sensor cable L=2m.	
TP 876.1	-30 +120	15s	Globe-thermometer probe for measuring radiant heat ø50 mm. (ISO7243, ISO7726). 4 wires Pt100 sensor cable L=2m.	
TP 877	-200 +400	3s		
TP879.1	-20 +120	60s	Penetration probe for compost 4 wires cable L = 2 m	

12 Temperature

KONTAKT:

MERAZET S.A.
ul. J. Krauthofera 36, 60-203 Poznań

tel. +48 61 864 46 00, fax: +48 61 865 19 33
e-mail: laboratorium@merazet.pl

PT100 SENSOR PROBES FOR OBSOLETE INSTRUMENTS					
CODE	°C max	τ s		DIMENSIONS	USE
TP 9 A	-70 +400	3,5s	CLASS A		
TP 9 AC	-70 +400	5,5s	CLASS A		
TP 9 AP	-70 +400	4s	CLASS A		
TP 93	-70 +400	3,5s	CLASS 1/3 DIN		
TP 93 C	-70 +400	5,5s	CLASS 1/3 DIN		
TP 93 P	-70 +400	4s	CLASS 1/3 DIN		
TP 932	-70 +200	3,5s	CLASS 1/3 DIN		
TP 932 P	-70 +200	4s	CLASS 1/3 DIN		
TP 95	-70 +400	3,5s	CLASS 1/5 DIN		
TP 95 P	-70 +400	4s	CLASS 1/5 DIN		

Temperature

When temperature exceeds 400°C avoid violent impact and thermal shock, as the Pt100 sensor may get irreparably damaged.

Temperature 13

KONTAKT:

MERAZET S.A.
ul. J. Krauthofera 36, 60-203 Poznań

tel. +48 61 864 46 00, fax: +48 61 865 19 33
e-mail: laboratorium@merazet.pl