

Cross-shaped wiring bench

voyants inusables sans maintenance



SUPPLIED WITH
4 fixed grids and
4 removable grids

Workstation for 4 users. Supplied with:

- 4 vertical electrical consoles with various outputs (see previous page).
- 4 grid frames
- 4 fixed grids 800 x 150mm
- 4 removable grids 600 x 500mm (useful area)
- 1 stratified bench 2000 x 750mm and 2 small ones 750 x 670mm.
- 2 storage areas for 4 removable grids each



ref. LAO-4C

ref. LAV-4C

SUPPLIED WITH 4 fixed grids and 4 removable grids

ELECTRICAL FEATURES OF THE VERTICAL CONSOLES (2 sides)



EMERGENCY STOP

- The push-button cuts off the power in the case of an emergency. Key-resettable (positive safety).

24VAC SUPPLY (insulated from mains)

- Used via 2 safety terminals. Primary winding of transformer protected by auto-protection and secondary wiring by circuit breaker.

GENERAL START/STOP

- A lamp indicating that the power is on.
- Start/stop operated using a double push-button.

230V MAINS DISTRIBUTION


- Two mains sockets 230V with lamp.

GENERAL PROTECTION

- Protection by thermal magnetic circuit breaker (30mA residual circuit breaker available as an option).

3-PHASE SUPPLY (3 X 400V + N+ E)

- A lamp indicating that the power is on.
- Output via 4 safety terminals.
- Key-operated power-on switch.

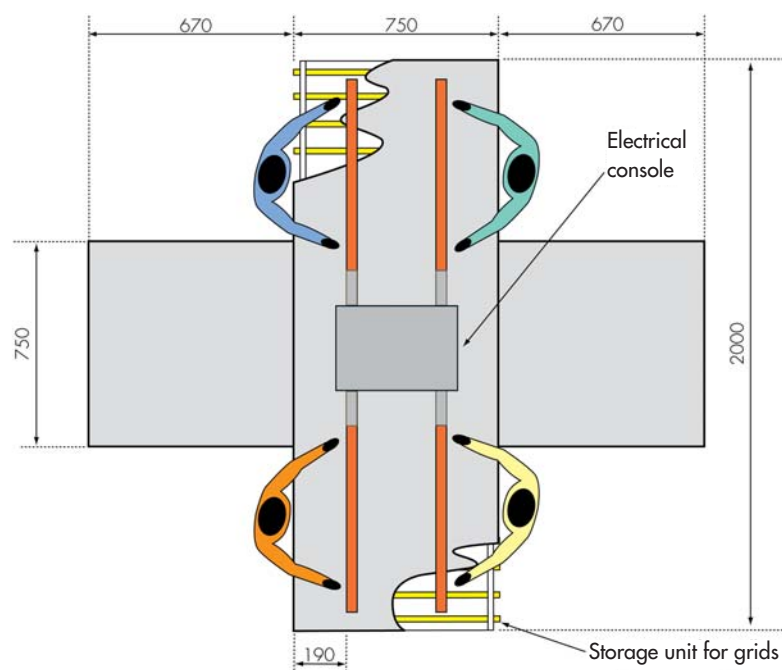


Options for wiring benches of pages 36 to 39

STORAGE UNIT FOR 2 GRIDS

Standard model



High and low guidance.
Compatible with grids
660 x 534mm (PA6050)



ref. GLS-2

Economical model



Compatible with grids up to
580 x 750mm max.
(tilted 15° compared to
the vertical)



ref. RAILECO

PNEUMATICS KIT FOR 4mm OUTPUT



A pneumatic distribution can be
fitted on the wiring benches. This
option is delivered complete with
air entry pipe, stop valve,
regulator with filter and manome-
ter, feeder tank with 4 quick-fit
junctions, means of fixing and
screws.

ref. DISLAB

24VDC - 1.8A OUTPUT




Electronic auto-protection.
Safety terminals 4mm
On/off switch
LED indicator light.

ref. CC24L

30mA RESIDUAL CURRENT CIRCUIT BREAKER



A Type

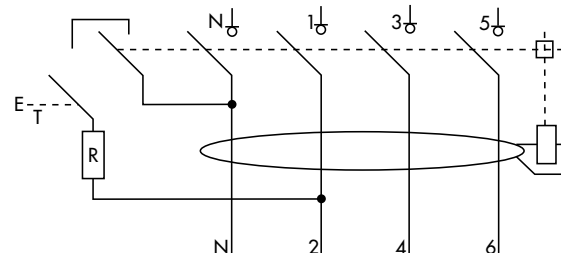


30mA residual current circuit-breaker. Single-phase bench.

ref. DIF30-2L

30mA residual current circuit-breaker. 3-phase bench.

ref. DIF30-4L

CIRCUIT CONTINUITY TEST



An optional circuit "Continuity test" is available.
This option allows to do some acoustic and
visual tests under 24VAC.

ref. CAV

360° LED LAMP



Replace your old lamps by some new hard-wearing LED lamps

- LED lamp with ten electroluminescent LED diodes without maintenance.
- Bulb with a bayonet fitting
(B15D type), 2 contact terminals
- Available in 2 voltages:
230VAC and 24VAC

ref. T15-230

230V

ref. T15-24

24V



VERTICAL CABLE RACEWAY



For the wiring of the power
cable from the aerial wiring
system to the top of upright
supply console

ref. LABO-CANNE

360° LIGHT SIGNAL TOWERS



ref. VOY61



ref. VOY121



ref. VOY181

THEY CAN BE SEEN THROUGH 360°. CAN BE PLACED EITHER ON THE CONSOLE OR ON A VERTICAL CABLE RACEWAY. STANDARD COLOURS: RED, GREEN, YELLOW. OTHER COLOURS: WHITE AND BLUE

COLOURS AVAILABLE UPON REQUEST

HARD WEARING LED LAMP

white - orange - red - green - blue



HANGING DRAWERS (300 SERIES) WITH LOCK AND KEY

For top in depth 750 mm or 1000 mm - Height: 400 mm - Width: 450 mm

REF	Drawer H=100mm	Drawer H=200mm	Drawer H=300mm
TIG-30	3	/	/
TIG-32	1	1	/
TIG-33	/	/	1



Ref. TIG-30



Ref. TIG-32

HANGING DRAWERS (400 SERIES) WITH LOCK AND KEY

For top in depth 750 mm or 1000 mm - Height: 400 mm - Width: 450 mm

REF	Drawer H=100mm	Drawer H=200mm	Drawer H=300mm
TIG-40	4	/	/
TIG-41	2	1	/
TIG-42	/	2	/
TIG-43	1	/	1



Ref. TIG-41



Ref. TIG-42

HANGING DRAWER WITH LOCK AND KEY

For top in depth 750 mm or 1000 mm
Height: 100 mm - Width: 400 mm

ref. TIG-10




FAST CONNECTIONS

These items are sold separately.


They allow the quick connection/disconnection of 10 contact points.

The female base can be fastened on rail, the male connector is movable.




Male connector
10 points, movable

ref. AB1-M



Female base
10 points, for rail

ref. AB1-F



Maximum section: 2.5 mm²

Maximum current: 10A

Maximum voltage between contacts:

380 V AC

MADE TO MEASURE

EXAMPLES OF PRODUCTS MADE TO MEASURE
FOLLOWING THE CUSTOMERS NEEDS

